

SUBROUTINE CMINVS(A,B,M,N)

C ** [A+iB]的逆距陣 **

C ** 將[A],[B]依序存入 unformatted file : UNIT 5 **

C ** 使用暫存檔: UNIT 4 **

C** 在主程式必須 open unit 4,5 **

C *****

REAL A(M,M),B(M,M)

REWIND 5

READ(5) ((A(I,J),J=1,N),I=1,N)

CALL MINVS(A,M,N,1E-7,ILL)

IF(ILL.NE.0) WRITE(3,10) ILL

10 FORMAT('ILL CMINVS ='I7)

READ(5) ((B(I,J),J=1,N),I=1,N)

CALL SEKI(A,B,M,N,N,N)

REWIND 4

WRITE(4) ((A(I,J),J=1,N),I=1,N)

CALL SEKI(B,A,M,N,N,N)

REWIND 5

READ(5) ((A(I,J),J=1,N),I=1,N) 及尼羅河之旅

DO 100 I=1,N

DO 100 J=1,N

100 A(I,J)=A(I,J)+B(I,J)

CALL MINVS(A,M,N,1E-7,ILL)

IF(ILL.NE.0) WRITE(3,11) ILL

11 FORMAT(1H0,'ILL CS.2 ='I7)

REWIND 4

READ(4) ((B(I,J),J=1,N),I=1,N)

CALL SEKI(B,A,M,N,N,N)

DO I=1,N

DO J=1,N

B(I,J)= - B(I,J)

END DO


END DO

CLOSE(4)


CLOSE(5)

RETURN

END

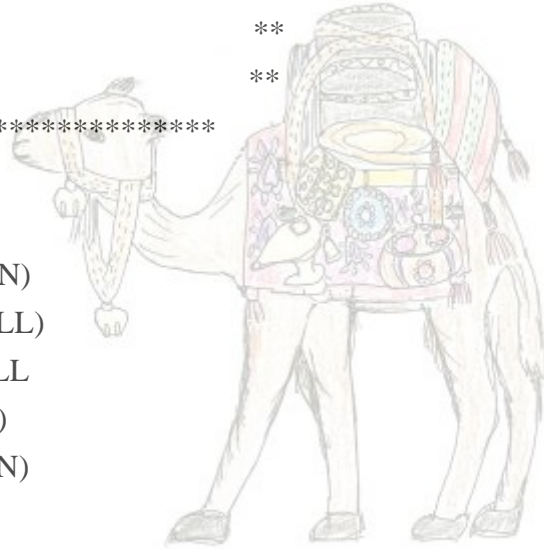

載滿珠寶的駱駝

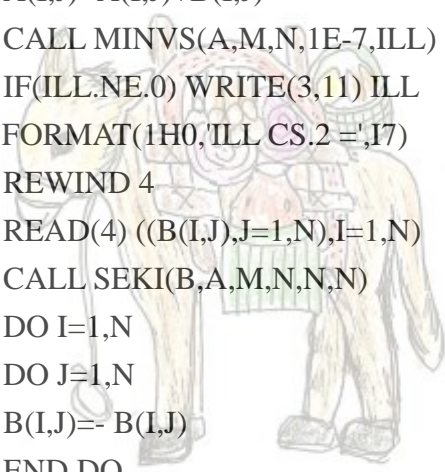

載滿貨品的馬廝子



阿拉丁神燈